

Description



Product Data Sheet

Telephone: +44 (0) 1246 488 360 Email: support@trans-amp.co.uk Website: www.trans-amp.co.uk







TT3486


Issue no.

1



Fender Bassman



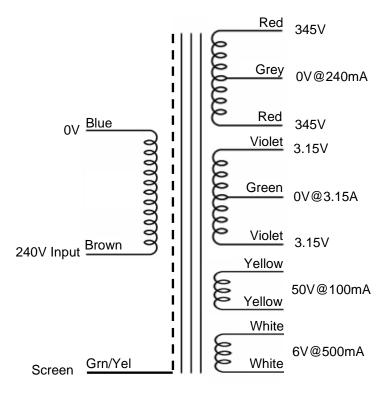

Part no.

Dimensions in mm		Electrical Data		
A 100		Input voltage 50/60Hz	240V	
В	114	HT open circuit voltage	359 - 0 - 359V	
С	95	Heater open circuit voltage	6.6V Centre tapped	
D	76	Rectifier heater open circuit voltage	6.2V	
Ē	95	Bias open circuit voltage	52.8V	
F	75	All leads 300mm long		

Raised by:	SW	Approved by:	DT	Date:	21/05/2015
raisca by.	0 1	rippiovou by.	ים	Date.	21/03/2013



Warning: Electricity is dangerous and can cause death!

If you are not qualified to install this product please consult a qualified, competent person Please be aware – You can still get an electric shock even if the appliance is disconnected!